



Technical data


1	Starting current*	Nm	0.05
2	Min. torque**	Nm	0.008
3	Max. permissible speed	rpm	1000
4	Max. permissible slip power***	W	5
5	Max. permissible operating temperature	°C	60
6	Weight	kg	0.08
7	Degree of protection	-	IP30
8	Product code	-	020a-028

* Tolerance for rated torque: +/- 10%.


** Corresponds to the torque at the lowest torque level.

*** Value determined at room temperature (22°C). Taking into account the maximum permissible operating temperature, the brakes may also be overloaded momentarily.

Dimensions

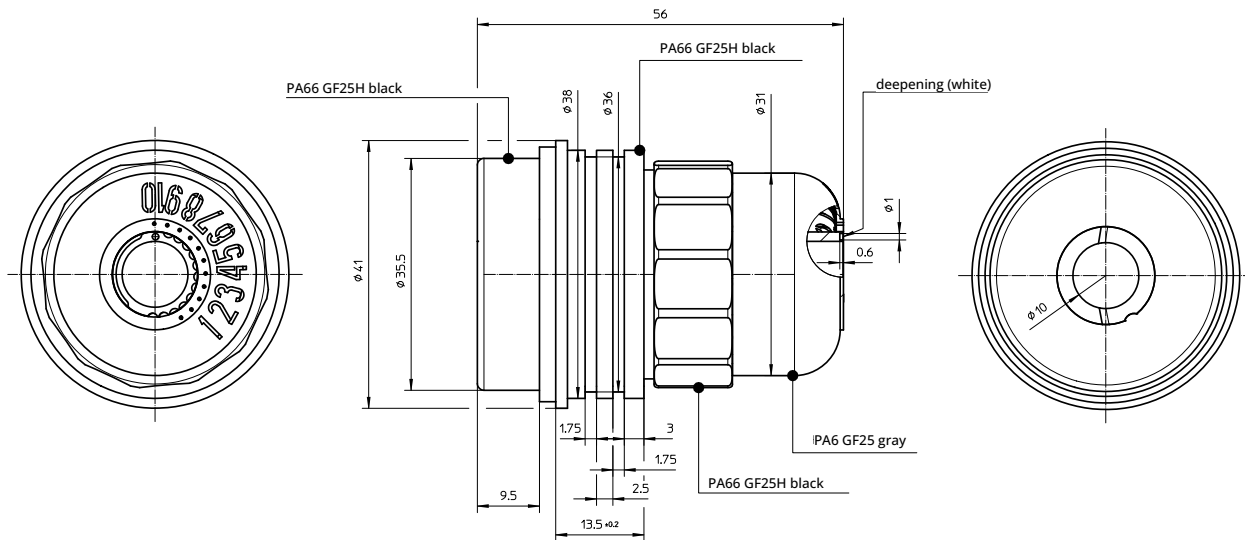

Torque characteristic curve

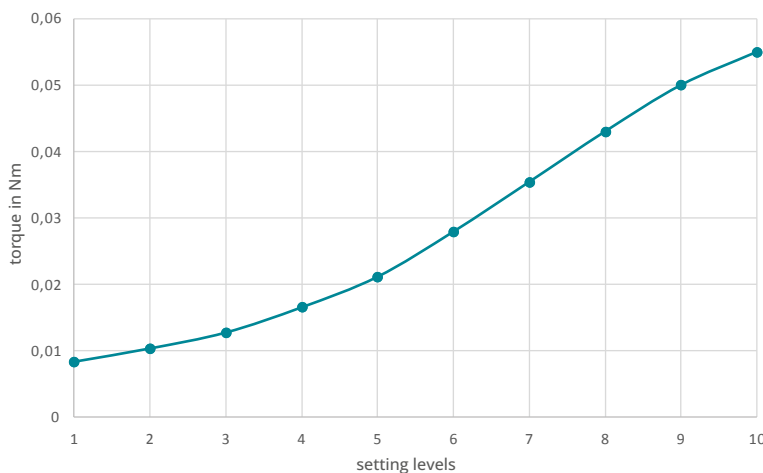

The drawings and data in this document are provided as general information for our customers. For specific use cases, a separate quotation must be requested. Kern Antriebstechnik GmbH accepts no responsibility for any errors found in the respective datasheets. Kern Antriebstechnik GmbH reserves the right to make changes to its products without prior notice. This also applies to products currently available on the market, provided that - unless otherwise specified - the modification in question does not restrict the product's usability. All goods and trademarks mentioned in this datasheet are the property of Kern Antriebstechnik GmbH.